

UX Specialty Series

40μm | 55μm | 100μm | Pigmented





#HEART OF RELIABILITY

Increased Ink Integrity

Unlike a gear pump, a diaphragm pump does not shear the ink passing through it. Ink shearing results in lower viscosity and can adversely affect print quality. Hitachi diaphragm pumps provide a consistent supply of ink to the print head.









Designed & Built by Hitachi

The diaphragm pump is the heart of each Hitachi printer. For this reason, Hitachi doesn't use an off-the-shelf product. Each pump is designed and built by Hitachi to the highest standards.



Heavy on Quality

Hitachi diaphragm pumps are one of the heaviest components in each printer. This weight is due to the high-quality components used in the manufacturing of each pump. Quality is never compromised. You create superior products. You should have a partner who does too.



Quad Chamber Design

Each pump is designed with four chambers allowing pump load to be distributed. Subsequently, the life span of each printer is significantly improved over single chamber pump designs.



Individual Pump Replacement

By allowing each ultra-reliable pump to be replaced individually, the Total Cost of Ownership for a UX Series printer is minimized.



UX Specialty Key Features

Hitachi's UX Series continuous inkjet printers represent the pinnacle of innovation in marking and coding technology, all while showcasing Hitachi's reputation for Reliability, Efficiency, and Ease of Use.

Efficient Ink Recovery





Traditional Fluid Recovery Systems

Ink passes through a channel of air increasing the evaporation rate and, consequently, fluid makeup consumption.

* As compared to Hitachi's current models with 1067K ink at 20°C. About 30% reduction for UX-B and UX-D.



Reduced Makeup Consumption and Running Cost

Featuring Pulse Recovery Technology

Hitachi's ink recovery technique and motor speed control, that is based on environmental conditions, suppresses makeup evaporation, thus achieving industry levels of low makeup consumption.



Hitachi's Pulse Recovery System

Ink is recovered using a pulsating system, which reduces the evaporation rate and makeup consumption, thus increasing your bottom line.

Worry Free Integration



IP-65

The UX Dynamic model printer is IP-65 rated, meaning it can be integrated into a variety of production environments without worry or modification to current production processes such as wash-down procedures. Hitachi UX Series printers can operate in High and Low temperature environments as well as dusty environments, allowing them to be placed close to the action. UX Basic machines are IP-55 standard.









Simple Fluid Management



Mess-Free, Mistake-Proof Fluid Refills

Intelligent fluid cartridges reduce the possibility of hazardous fluid spills during refill. Being two different shapes, the lnk and Makeup cartridges are easily identifiable as well as sized to fit in each respective receptacle.



Smart Cartridge

Error reduction is key to increased uptime and that's why the UX Series now features RFID Recognition for ink and makeup replacement. A quick scan of each bottle allows the system to identify the ink or makeup in question and instruct the operator based on compatibility.



Tool-less Filter Replacement

Ink Filters can be replaced without the use of tools or a technician, resulting in virtually zero downtime for simple maintenance. No more mandatory, time based failure due to machine operation. These printers provide the lowest total cost of operation on the market.



Simple, Economical Disposal

Ink and Makeup cartridges can be used right up to the last drop, and drain fully into their respective reservoirs. Complete fluid evacuation allows ink and makeup containers to be disposed of through conventional means instead of costly hazardous disposal methods.



Intuitive Print Control



Intuitive User Interface

A 10.4-inch TFT LCD touch-panel screen provides a wide, easy-to-see viewing angle and intuitive operation. In addition, when changing print messages, a preview function allows the operator to verify on screen what message will be changed to help avoid erroneous printing.



Troubleshooting Guide

The UX Series features an integrated, easy to access troubleshooting guide, helping operators easily find answers to common issues and reducing downtime due to simple problems.





Easy USB Message Transfer

Messages can be easily backed up onto a USB flash drive for convenient transferring to other printers.



Informative Icons

Icons on screen provide simple, visual feedback to an operator. Ink and Makeup level gauges show the current fluid level and indicate when it's time to replace each cartridge. This allows for more efficient ink usage, reduces waste, and further contributes to cost reduction.




40µm (Small Characters)

Application Photos







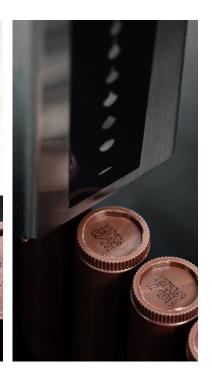




Print Samples (Approx. Full Scale)

Font (Horizontal x Vertical)	UX-D140W
5 x 5	1 0123456789
12 x 16	□ 01234ABCDEアイウエオ. No ABCSE

ltem		Model		
		UX-D140W		
Nozzle Size		40μm		
Max. # of Print Lines		Up to 4 lines		
Max. # of Print Characters		Up to 1,000 characters		
	4 x 5	√		
	5 x 5	✓		
	5 x 7(8), 9 x 7(8)	✓		
Font	7 x 10	√		
(horizontal x vertical)	11 x 11	✓ (Chinese Only)		
	12 x 16	√		
	18 x 24	✓		
	24 x 32	√		
Character Height		1 - 5 mm		
Display & Input Device		WYSIWYG Design Display: TFT LCD (10.4" color), backlight provided Input Device: Touch Panel, Input Sound Provided		
Screen Language (2 languag	ges selectable)	English, Chinese, Korean, Thai, Vietnamese, German, French, Dutch, Italian, Spanish, Portuguese, Swedish, Danish, Greek, Russian, Czech, Polish, Arabic, Serbian, Turkish, Hungarian, Bulgarian, Catalan, Romanian, Finnish, Norwegian, Slovenian		
Max. Print Rate (Characters per second) (For	nt 5x5, Space 1, 1 Line)	Up to 3,030		
Standard Characters		Alphanumeric (A-Z, a-z, 0-9), Symbols (27) and Space: Total 90		
User Pattern		200 patterns each for dot matrix		
Print Functions		Calendar, Count, Font mixture, Password		
Barcode Printing		code39, ITF, NW-7, EAN-13, EAN-8, UPC-A, UPC-E, code128/EAN-128, GS-1 DataBar		
2D Code Printing		Data Matrix (Alphabet: 49 characters/Numerals: 98 characters), QR ⁻¹ , Micro QR code		
Message Storage Capacity		2,000 messages (depends on data content)		
Input Signal		Print target detection, Printing stop, Rotary encoder pulse, Reciprocative printing, Remote control (Run, Stop, High-voltage ON / OFF, Reset), (NPN / PNP Selectable)		
Output Signal		Print in progress or Print complete, Online (NPN / PNP Selectable), Print ready, Fault, Warning (NPN Only)		
Data Interface		RS-232C at baud rates selectable up to 115,200bps		
Ethernet (Modbus communic	cation)	IEEE802.3, 100BASE-T		
External Memory		USB for user data storage		
Print Head Cable Length/Angle		4m (in-line/90 degrees)		
Operating Temperature Range		0-35°C (1067K lnk)		
Operating Humidity Range		30-90% RH (no condensation)		
Power Supply (Automatic Voltage Selection)		AC100-120/220-240V±10% 50/60Hz 120VA		
Approval		CE, UL, cUL, C-Tick, FCC, ICES		
Dimensions (W x D x H)		400 x 320 x 527 mm		
International Protection		IP65		
Approximate Weight		27kg		

¹ Please consult your nearest sales representative when "18x24 font" or "QR code" is required with UX-D for High-speed printing.

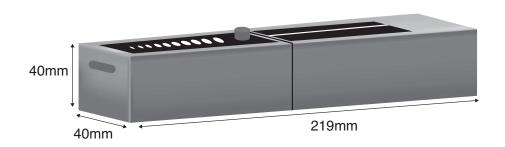



55µm (High Speed)














Print Samples (Approx. Full Scale)

Font (Horizontal x Vertical)		UX-D150W
	1 LINE	0123456789ABCDEFGHIJKLMN
5 x 7	2 LINE	0123456789ABCDEFGHIJKLMN ABCDEFGHIJKLMNOPQRSTUVWX
	3 LINE	0123456789ABCDEFGHIJKLMN ABCDEFGHIJKLMNOPGRSTUVWX 0123456789ABCDEFGHIJKLMN
	4 LINE	0123456769ABCDEFGHIJKLMH ABCDEFGHIJKLMNOPGRSTUVWX 0123456789ABCDEFGHIJKLMH ABCDEFGHIJKLMNOPGRSTUVWX

ltem		Model	
		UX-D150W	
Nozzle Size		55μm	
Max. # of Print Lines		Up to 4 lines	
Max. # of Print Characters		Up to 1,000 characters	
	4 x 5	✓	
	5 x 5	√	
	5 x 7(8), 9 x 7(8)	✓	
Font	7 x 10	√	
(horizontal x vertical)	11 x 11	-	
	12 x 16	✓ ·	
	18 x 24	√ *1	
	24 x 32	-	
Character Height	•	2 - 8 mm	
Display & Input Device		WYSIWYG Design Display: TFT LCD (10.4" color), backlight provided Input Device: Touch Panel, Input Sound Provided	
Screen Language (2 language	ges selectable)	English, Chinese, Korean, Thai, Vietnamese, German, French, Dutch, Italian, Spanish, Portuguese, Swedish, Danish, Greek, Russian, Czech, Polish, Arabic, Serbian, Turkish, Hungarian, Bulgarian, Catalan, Romanian, Finnish, Norwegian, Slovenian	
Max. Print Rate (Characters per second) (Fo	nt 5x5, space 1, 1 Line)	Up to 3,173	
Standard Characters		Alphanumeric (A-Z, a-z, 0-9), Symbols (27) and Space: Total 90	
User Pattern		200 patterns each for dot matrix	
Print Functions		Calendar, Count, Font mixture, Password	
Barcode Printing		code39, ITF, NW-7, EAN-13, EAN-8, UPC-A, UPC-E, code128/EAN-128, GS-1 DataBar	
2D Code Printing		Data Matrix (Alphabet: 49 characters/Numerals: 98 characters), QR code ⁻¹ , Micro QR code	
Message Storage Capacity		2,000 messages (depends on data content)	
Input Signal		Print target detection, Printing stop, Rotary encoder pulse, Reciprocative printing, Remote control (Run, Stop, High-voltage ON / OFF, Reset), (NPN / PNP Selectable)	
Output Signal		Print in progress or Print complete, Online (NPN / PNP Selectable), Print ready, Fault, Warning (NPN Only)	
Data Interface		RS-232C at baud rates selectable up to 115,200bps	
Ethernet (Modbus communi	cation)	IEEE802.3, 100BASE-T	
External Memory		USB for user data storage	
Print Head Cable Length/Angle		4m (in-line/90 degrees)	
Operating Temperature Range		0-40°C (1067K lnk)	
Operating Humidity Range		30-90% RH (no condensation)	
Power Supply (Automatic Voltage Selection)		AC100-120/220-240V±10% 50/60Hz 120VA	
Approval		CE, UL, cUL, C-Tick, FCC, ICES	
Dimensions (W x D x H)		400 x 320 x 527 mm	
International Protection		IP65	
Approximate Weight		27kg	

¹ Please consult your nearest sales representative when "18x24 font" or "QR code" is required with UX-D for High-speed printing.

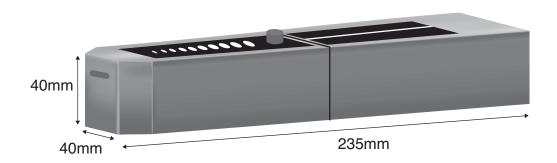



100μm (Large Characters)



Application Photos










Print Samples (Approx. Full Scale)

Font (Horizontal x	UX-D110W		
Vertical)	Standard	Bold	
18 x 24	01A	01 A	
	01A	O1A	
24 x 32	01A	01A	
	01A	01A	

ltem		Model		
		UX-D110W		
Nozzle Size		100µm		
Max. # of Print Lines		Up to 4 lines		
Max. # of Print Characters		Up to 1,000 characters		
	4 x 5	✓		
	5 x 5	√		
	5 x 7(8), 9 x 7(8)	✓		
Font	7 x 10	✓		
(horizontal x vertical)	11 x 11	-		
	12 x 16	✓ ·		
	18 x 24	✓		
	24 x 32	✓ ·		
Character Height	•	3 - 15 mm		
Display & Input Device		WYSIWYG Design Display: TFT LCD (10.4" color), backlight provided Input Device: Touch Panel, Input Sound Provided		
Screen Language (2 langua	ges selectable)	English, Chinese, Korean, Thai, Vietnamese, German, French, Dutch, Italian, Spanish, Portuguese, Swedish, Danish, Greek, Russian, Czech, Polish, Arabic, Serbian, Turkish, Hungarian, Bulgarian, Catalan, Romanian, Finnish, Norwegian, Slovenian		
Max. Print Rate (Characters per second) (Fo	ont 5x5, space 1, 1 Line)	Up to 468		
Standard Characters		Alphanumeric (A-Z, a-z, 0-9), Symbols (27) and Space: Total 90		
User Pattern		200 patterns each for dot matrix		
Print Functions		Calendar, Count, Font mixture, Password		
Barcode Printing		code39, ITF, NW-7, EAN-13, EAN-8, UPC-A, UPC-E, code128/EAN-128, GS-1 DataBar		
2D Code Printing		Data Matrix (Alphabet: 49 characters/Numerals: 98 characters), QR1, Micro QR code		
Message Storage Capacity		2,000 messages (depends on data content)		
Input Signal		Print target detection, Printing stop, Rotary encoder pulse, Reciprocative printing, Remote control (Run, Stop, High-voltage ON / OFF, Reset), (NPN / PNP Selectable)		
Output Signal		Print in progress or Print complete, Online (NPN / PNP Selectable), Print ready, Fault, Warning (NPN Only)		
Data Interface		RS-232C at baud rates selectable up to 115,200bps		
Ethernet (Modbus commun	ication)	IEEE802.3, 100BASE-T		
External Memory		USB for user data storage		
Print Head Cable Length/Angle		4m (in-line/90 degrees)		
Operating Temperature Range		0-35°C (1067K lnk)		
Operating Humidity Range		30-90% RH (no condensation)		
Power Supply (Automatic Voltage Selection)		AC100-120/220-240V±10% 50/60Hz 120VA		
Approval		CE, UL, cUL, C-Tick, FCC, ICES		
Dimensions (W x D x H)		400 x 320 x 527 mm		
International Protection		IP65		
Approximate Weight		27kg		

¹ Please consult your nearest sales representative when "18x24 font" or "QR code" is required with UX-D for High-speed printing.

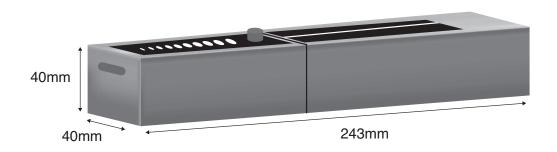



Pigmented - High Performance for High Contrast







Easy Automated Nozzle Cleaning

Nozzle cleaning is as simple as pressing a button. Once nozzle cleaning is completed the printer will be set to stop mode automatically. The UX Series Pigmented printer also supports nozzle backwash functions, which allows cleaning fluid to be ingested through the nozzle, quickly and easily clearing any clogs.



Worry-Free Standby Circulation


The UX Series Pigmented inkjet printer also incorporates an ink circulation control method that allows ink to circulate even in standby mode. This helps to prevent ink fixing, increasing operational efficiency and further reducing potential downtime.



Airless Stirring System

Most pigmented inkjet systems require air to prevent settling and agglomeration, but the UX Series Pigmented inkjet printer relies on a simple, yet highly effective Magitate system. This system reduces filter and nozzle clogging and eliminates the need for costly modifications to your compressed air system.

Magnet + Agitate = Magitate



Application Photos











Print Samples (Approx. Full Scale)

Font	Ampies (Approx. 1 un Scale)			
(Horizontal × Vertical)		UX-P160)W/S	
5×5		12345678 BODEFGHI	012345678 ABCDEFGHI JKLMNOP@R	0187486789 0187486761 088748444 088748444 088748444
5×7		12345678 BCDEFGHI	012345678 ABCDEFGHI JKLMNOPQR	O12345678 ABCDEFGHI JKLMNOROR STUVWXYZA
7×10	± 0123456789 ★ 112345	1234567 BCDEFGH	0123456789 ABCDEFGHIJ TUVUXYZABC	012345678 KLMNOPORS DEFGHIJKL
10×12	*O12345676	SABCD		ig 7890 GHIJK
12×16	*0123456789		ナカキクケコ 	Q1234 GBCDE
18×24	*012345	6789 4561		
24×32	*01234!	5678	9ABCD	EF
30×40	0123	345f	ABCD	
36×48	012	345	5ABC	
Logo) JIS mark CE mar	k UL mark	DIN printing	Chimny printing
		81 81	ABC J8#	CO see Cel 150 150 LO

ltem		Model	
		UX-P160 W / S	
Nozzle Size		65µm	
Max. # of Print Lines		Up to 6 lines	
Max. # of Print Characters		Up to 1,000 characters	
	4 x 5	✓	
	5 x 5	✓	
	5 x 7(8), 9 x 7(8)	✓	
	7 x 10	✓	
	11 x 11	✓ (Chinese Only)	
Font (horizontal x vertical)	10 x 12	✓ ·	
,	12 x 16	✓	
	18 x 24	✓	
	24 x 32	✓	
	30 x 40	✓	
	36 x 48	✓	
Character Height		2 - 10 mm	
Display & Input Device		WYSIWYG Design Display: TFT LCD (10.4" color), backlight provided Input Device: Touch Panel, Input Sound Provided	
Screen Language (2 languag	es selectable)	English, Chinese, Korean, Thai, Vietnamese, German, French, Dutch, Italian, Spanish, Portuguese, Swedish, Danish, Greek, Russian, Czech, Polish, Arabic, Serbian, Turkish, Hungarian, Bulgarian, Catalan, Romanian, Finnish, Norwegian, Slovenian	
Max. Print Rate (Characters per second) (For	nt 5x5, space 1, 1 Line)	Up to 2,083 (JP-W89 Ink)	
Standard Characters		Alphanumeric (A-Z, a-z, 0-9), Symbols (27) and Space: Total 90	
User Patterns		200 patterns each for dot matrix	
Print Function		Calendar, Count, Font mixture	
Barcode Printing		code39, ITF, NW-7, EAN-13, EAN-8, UPC-A, UPC-E, code128/EAN-128, GS-1 DataBar	
2D Code Printing		Data Matrix (Alphabet: 49 characters/Numerals: 98 characters), QR code, Micro QR code	
Message Storage Capacity		Up to 2,000 messages (depends on data content)	
Input Signal		Print target detection, Printing stop, Rotary encoder pulse, Reciprocative printing, Remote control (Run, Stop, High-voltage ON / OFF, Reset), (NPN / PNP Selectable)	
Output Signal		Print in progress or Print complete, Online (NPN / PNP Selectable), Print ready, Fault, Warning (NPN Only)	
Data Interface		RS-232C at baud rates selectable up to 115,200bps	
Ethernet		IEEE802.3, 100BASE-T	
External Memory		USB for user data storage	
Print Head Cable Length/Angle		4m (in-line/90 degrees)	
Operating Temperature Range		0-40°C (JP-W89 Ink)	
Operating Humidity Range		30-90% RH (no condensation)	
Power Supply (Automatic Voltage Selection)		AC100-120/220-240V±10% 50/60Hz 120VA	
Approval		CE, UL, cUL, RCM, FCC, ICES	
Dimensions (W x D x H)		400 x 320 x 527 mm	
International Protection		IP65	
Approximate Weight		27kg	



HITACHI Inspire the Next



- Hitachi Industrial Equipment Systems Co., Ltd. (Hitachi) shall not be liable for any manufacturing loss, or any product damage due to trouble or malfunction of the ink jet printer.
- Hitachi continually improves products. The right, therefore, is reserved to alter the designs and/or specifications without giving prior notice.
- Information in this brochure is subject to change without notice.

Visit www.hitachi-america.us/inkjetprinters/ or call (866) 583-0048 For more information, please contact your nearest sales representative.

Hitachi Industrial Equipment



Registration number: JQA-QMA12087 Registration date: April 1, 2005

The Marking Systems and Hoist Systems Division (Taga Division) of Hitachi Industrial Equipment Systems Co., Ltd. obtained international standard ISO 9001 certification for the quality assurance of the Ink Jet Printer contained in this brochure.