
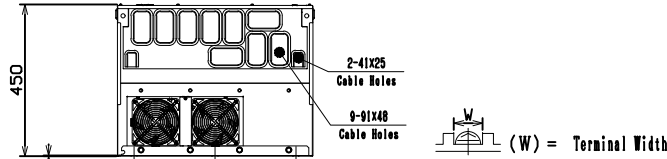
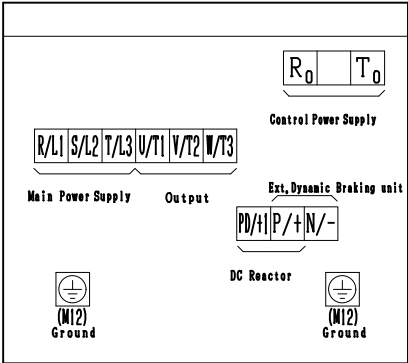


INVERTER MODEL LIST	
ITEM NO.	MODEL NUMBER
1	P1-06600-HF

INVERTER				
Model	Input		Number of phases	Mass (kg)
	Voltage (V)	Frequency (Hz)		
P1-06600-HFF (P1-3150HFF)	380~500	50/60	3	170
Output				
Capacity (kVA)	Voltage (V)	Current (A)	Frequency range (Hz)	
VLD ---	380~500	660	0.00~60.00	
LD 434.3/571.5 (380V/500V)			(0.00~500.00Hz Configurable)	
ND 394.8/519.6 (380V/500V)				

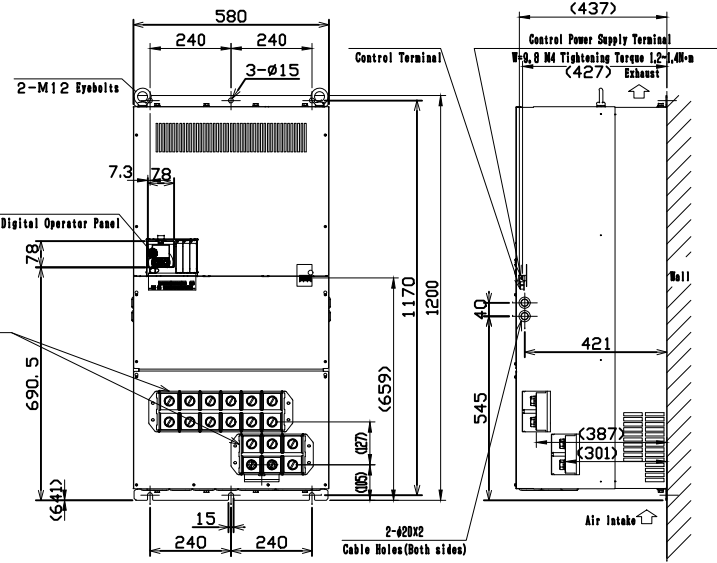

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HIESA. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HIESA IS PROHIBITED.

USE	DIMENSION in mm			PROJECTION
NOTICE	ENCLOSURE	SPECIFICATION	ATTACHED	DRAWING NO.
This product does not conform to functional safety standards.	IP20/IL 000 120	SHEET	NOT ATTACHED	

A. Saito Sep-19-2019
 M. Hirata Sep-19-2019
 T. Uchida Sep-19-2019

DIMENSION

4
 3T854862

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM/INCHES GENERAL TOLERANCES ACCORDING TO ISO 2768-MH-E	UPDATED	NAME	DATE	HITACHI INDUSTRIAL EQUIPMENT & SOLUTIONS AMERICA LLC TITLE: P1-06600-HF
	CHECKED	MIG	11AUG21	
	ENG APPR.			
	MFG APPR.			
INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.	COMMENTS:		SIZE DWG. NO.
MATERIAL			REV	
FINISH			A	
SCALE:		WEIGHT:	SHEET 1 OF 1	